



# ESPRESSO DOWN LIGHT PENDANT

## GV SERIES / 5500 LUMENS MAX LED



### ME-LEDGV

#### APPLICATION

Espresso Pendant features an unique hourglass shape for direct down lighting.

#### FEATURES

Speclume series fixtures offer contemporary style with functional luminaire performance. Fixtures are designed and manufactured in our factory. Espresso Pendant is available in two sizes for direct lighting. Passive integral heat sink. LED module and drivers are replaceable and upgradable. Variety of mounting and lens options. CCT temps may be mixed to create daylight warm downlight or other combinations.

#### FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. See mounting and color pages for standard finishes. Specify both interior and exterior finish. Interior standard interior matte white finish.

#### ELECTRONICS


GV LED system features high brightness white Samsung LED's. 3 step MacAdam Ellipse binning. Standard CRI: 85+. Higher CRI, R9 and custom LED configurations are available; consult factory. Variety of electronic 120V/277V and dimming drivers.

#### CONSTRUCTION

Fixtures are spun in our factory from 0.063 high purity aluminum. Passive machined aluminum heatsink for optimal thermal management.

#### CODE COMPLIANCE

ARRA Compliant. ETL listed for damp locations. Manufactured and tested to UL standards No. 1598/8750.

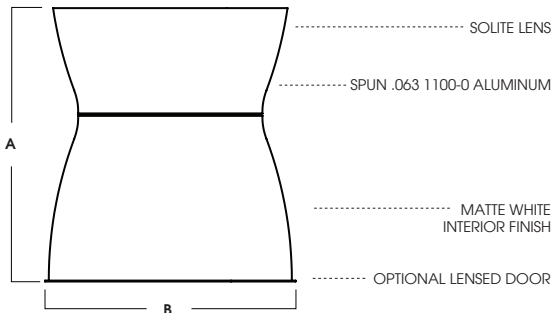

SERIES	A	B
ME1314	14.4	13.9
ME1816	18.1	16.7

WATTAGE TO LUMENS UPDATE			
CURRENT PART NUMBER EXAMPLE	PREVIOUS PART NUMBER EXAMPLE	SOURCE LUMENS <sup>1</sup>	SYSTEM WATTS
ME1314LEDGV15L	ME1314LEDGV14W	1500	9
ME1314LEDGV27L	ME1314LEDGV26W	2700	16
ME1314LEDGV37L	ME1314LEDGV37W	3700	23
ME1314LEDGV55L	N/A	5500	36

SERIES	LUMENS <sup>1</sup>	CCT	DRIVER / DIMMING <sup>2</sup>	LENS	MOUNTING <sup>3</sup>	INTERIOR FINISH	FINISH <sup>7</sup>
ME1314LEDGV ME1816LEDGV	15L 1500 Lm 27L 2700 Lm 37L 3700 Lm 55L 5500 Lm	27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	EX Electronic Driver, 120V/277V DS10X 10% 0-10V Dimming, 120V/277V DO10X 1% 0-10V Dimming, 120V/277V DLTE1 Lutron 2 Wire Phase Dimming, 120V Only DL3EX Lutron ECO System Dimming, 120V/277V DL33X Lutron Hi Lume Dimming, 120V/277V	DOOR13GL 13" Door w/ Clear Lens DOOR13FG 13" Door w/ Frosted Glass DOOR18GL 18" Door w/ Clear Lens DOOR18FG 18" Door w/ Frosted Glass	HM <sup>4</sup> Hang Straight HMA <sup>4</sup> Hang Straight All Thread CD <sup>4</sup> Cord / Cable Mount 3XCD 3 Cord Cable Mount with Cord EMERGENCY BATTERY OPTIONS EMCP7W 7W Canopy Mounted EM EMRM7W 7W Remote EM EMEN7W 7W Remote with Enclosure EMLN7W <sup>5</sup> 7W In-Line EM (For Pendants)	MW <sup>6</sup> Matte White MB <sup>6</sup> Matte Black PT <sup>6</sup> Platinum Silver GFI Gold Flake GAI Galvanized ORI Orange YLI Yellow BLI Blue GRI Green RDI Red	MW <sup>6</sup> Matte White MB <sup>6</sup> Matte Black PT <sup>6</sup> Platinum Silver TW Textured White TB Textured Black MT Textured Silver BZ Bronze OB Oil Rubbed Bronze CH Charcoal GH Graphite AC Champagne SN Sun Gold BR Brecchia Rust AN Anodic Natural CO Copper Metallic CC Custom Color

**EXAMPLE:** ME1314LEDGV15L27KEX/DOOR13GL/3XCDCH

**NOTES:**  
 1 Normal Source Lumens at 3500K 2 Contact Factory for Additional Options 3 See Mounting Page for Details on Components and Finishes  
 4 Specify Length in Inches: See Mounting Page for Available Lengths 5 No EM On The Cord and Cable Mounting 6 Standard Finishes  
 7 Contact Factory for Special Finishes

Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.



<b>PROJECT:</b>	<b>TYPE:</b>
<b>CAT. NO.:</b>	

WWW.SPECLIGHT.COM • 994 JEFFERSON STREET, FALL RIVER, MA 02721 • 508.678.2303 FAX 508.678.2260

