

Shaper

DESCRIPTION

605 Luminous Wall Sconce is ADA compliant.

- Interior Wall Luminous Vanity Luminaire
- Painted solid aluminum w/ extruded white acrylic panel
- Universal circular strap for a standard 4" J-box or plaster ring
- UL and CUL approved for interior and damp locations; ADA compliant

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Material

Painted solid aluminum with a 1/8" matte white extruded acrylic panel.

Finishes:

- ALP (Aluminum Paint)
- MW (Matte White)
- MB (Matte Black)
- GRM (Graphite Metallic)
- DP (Dark Platinum)
- BM (Bronze Metallic)
- CC (Custom Color – Specify)

For Custom Color contact factory for quotation.

LED

- 25" L3:2000 (nominal lumens at max) 20W
- 37" L4:3000 (nominal lumens at max) 29W
- 49" L5:4000 (nominal lumens at max) 38W

Driver

LED system coupled with electrical driver to deliver optimal performance. Electronic drivers are available for 120-277V applications. A 0-10V dimming control is available (Standard) on all models.

Installation


Supplied with a universal circle strap for a standard 4" J-box or round or octagonal plaster ring. Horizontal or vertical mount. Shaper luminaires are designed for interior installations only.

Options

- Two Horizontal Trim Bars (2HTB)
- Two Vertical Trim Bars (2VTB)
- Remote Battery Pack (RBP)

Compliance


U.L. and C.U.L approved for indoor and damp location.



605 SERIES

- 25"**
- Lumen Output Source Lumens: L3:2000 nominal lumens at max
 - Wattage: 20W
 - Color Rendering: CRI 83+
 - Correlated Color Temperature: 4000K, 3500K, 3000K, 2700K
 - Rated Life of Lamp (hrs): 50,000
 - Dimming: 0-10V
- 37"**
- Lumen Output Source Lumens: L4:3000 nominal lumens at max
 - Wattage: 29W
 - Color Rendering: CRI 83+
 - Correlated Color Temperature: 4000K, 3500K, 3000K, 2700K
 - Rated Life of Lamp (hrs): 50,000
 - Dimming: 0-10V
- 49"**
- Lumen Output Source Lumens: L5:4000 nominal lumens at max
 - Wattage: 38W
 - Color Rendering: CRI 83+
 - Correlated Color Temperature: 4000K, 3500K, 3000K, 2700K
 - Rated Life of Lamp (hrs): 50,000
 - Dimming: 0-10V

DIMENSIONS

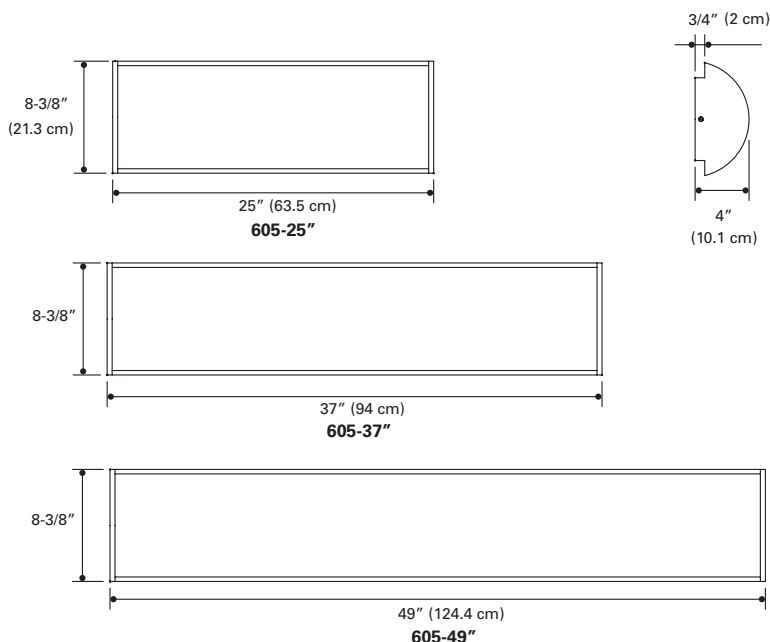

ORDERING INFORMATION

Sample Number: 605-37-W-L4/827-UNV-ALP-2VTB

Series	Size	Mounting Type	LED Lamp			LED Voltage	Finish	Options
			25"	37"	49"			
605 = Luminous Sconce	25=25"	W=Interior Wall	L3/827	L4/827	L5/827	UNV (120-277V)	ALP=Aluminum Paint MW=Matte White MB=Matte Black DP=Dark Platinum GRM=Graphite Metallic BM=Bronze Metallic CC=Custom Color - Contact factory for quotation	2VTB=Two Vertical Trim Bars 2HTB=Two Horizontal Trim Bars RBP=Remote Battery Pack (Max 5' Mounting Distance)
	37=37"		L3/830	L4/830	L5/830			
	49=49"		L3/835	L4/835	L5/835			
			L3/840	L4/840	L5/840			